



...StorageSolutions
without limits!



RaidSonic
<http://www.raidsonic.de>

ICY DOCK ICY BOX STARBORN

Press release RaidSonic 2.1/2009

Key features


- Powerful Media Chip Sigma Designs EM8635
- Supports: LAN 10/100 Mbps, RJ-45
- Supports: Wi-Fi IEEE802.11n (optional Wi-Fi USB dongle required)
- 4 servers in one: UP'n'P, SAMBA, NFS, FTP
- Supports all current formats
- Audio out: Stereo 2 Ch (RCA), SPDIF (coaxial/optical)
- Video out: HDMI 1.3, Composite, S-Video, Component
- Supports 3.5" SATA HDDs up to 1.5 TB
- File System: Ext3 (supports full network functional range), NTFS/FAT32 (limited network functional range)
- Transfer rates: USB 2.0 up to 480 Mbit/s
- Supports Windows up to XP/Vista/Windows7, MAC OS > 9/X, Linux
- Controllable by remote control and USB keyboard – connected by cable or RF transfer (keyboard not included)

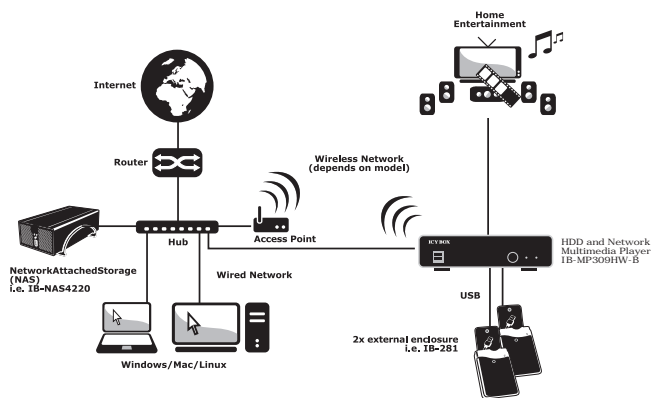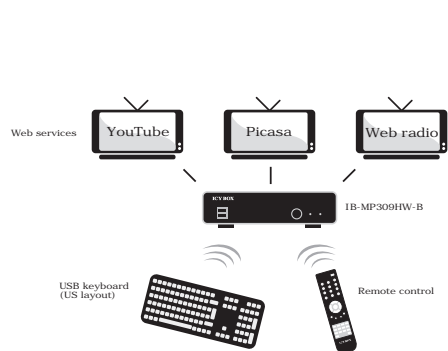

- Video formats**
1. MPEG-1 VCD format (1.15Mbps CBR) [.mpg, .mpe, .mpeg, .dat, .m1v, .iso]
 2. SD and HD MPEG2 up to 20 and 40 Mbps [.mpg, .mpe, .mpeg, .m2v, .vob, .vro, .iso]
 3. SD and HD MPEG-4 (OpenDivx, Xvid, MP4) [.avi, .divx, .mov, .mp4, H.264, .iso]
 4. SD and HD WMV9 [.asf, .wmv, .mkv, .iso]
 5. AVI audio codec: MP3, AC3, PCM, WMA, Ogg
- Subtitle formats**
1. Subtitle (MicroDVD, SubRip, Sub Station Alpha, Sami) [.sub, .srt, .saa, .smi]

- Audio formats**
1. MPEG-1 Layer1 (MP1) [.mp1, .mpa]
 2. MPEG-1 Layer2 (MP2) [.mp2]
 3. MPEG-1 Layer3 (MP3) [.mp3]
 4. Ogg Vorbis (OGG) [.ogg]
 5. AC3 5.1 (AC3) [.ac3]
 6. Microsoft PCM Wave (WAV) [.wav]
 7. Advanced Audi Coding (AAC, ADIF, ADTS) [.aac]
 8. Microsoft Windows Media Audio Professional (WMA Pro) [.asf]
 9. Free Lossless Audio Codec (FLAC) [.flac]
- Pictures formats** JPEG, PNG, GIF

Front view

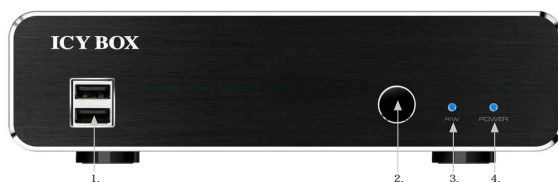

1. 2x USB 2.0 Host
2. Data access LED
3. Infrared Window
4. Power LED

Back view



1. Power supply IN
2. USB 2.0 to PC
3. HDMI OUT
4. Composite OUT
5. S-Video OUT
6. YPbPr (Component) OUT
7. S/PDIF coaxial OUT
8. S/PDIF optical OUT
9. Stereo L/R OUT
10. RJ-45 10/100 Mbp/s interface
11. ON-/OFF switch
12. 40 mm cooling fan